

# Model HT-34 by

**Extreme Versatility: Only NSF approved machine to clean  
“Utensils, Pots, Pans & Dishes”**

**Dual Sanitizer  
Low or High Temp**



**Clean Pots, Pans, or  
Utensils in the provided  
29” x 29” Stainless Steel  
Rack or  
Wash Dishes with  
Standard Dish Racks**

**Ideal for Supermarkets,  
Schools, Bakeries,  
Commissaries, & Caterers**

At American Dish Service, Quality People, Designs,  
and Products have been the foundations of our  
organization for over *45 years*.

[www.americandish.com](http://www.americandish.com)

  
**American Dish Service**  
*Manufacturers of Ware Washing Equipment*

900 Blake Street Edwardsville, KS 66111-3820 **Toll Free** (800) 922-2178 **Phone** (913) 422-3700 **Fax** (913) 422-6630

# Model HT-34


This Powerful, Next Generation, Utensil Pot Washer/ Dishwasher provides you with all these features

- NSF Rating to Clean Pots & Dishes
- 72 Second Time Cycle
- Wash Extender for Extra Scouring Time
- Optional Built-On 70 Degree Rise Booster
- Patented Self Cleaning Spray System
- Auto Fill and Auto Shut Off
- ADS Patented Low-Water Tank Clean
- Built-In Scrap Accumulator - Keeps Wash Tank Clean
- 1.25 Gallons per Rack
- 23" Door Opening
- Powerful 3HP Wash Pump



Provides the scrubbing action needed for both applications

Requires Deep Tables

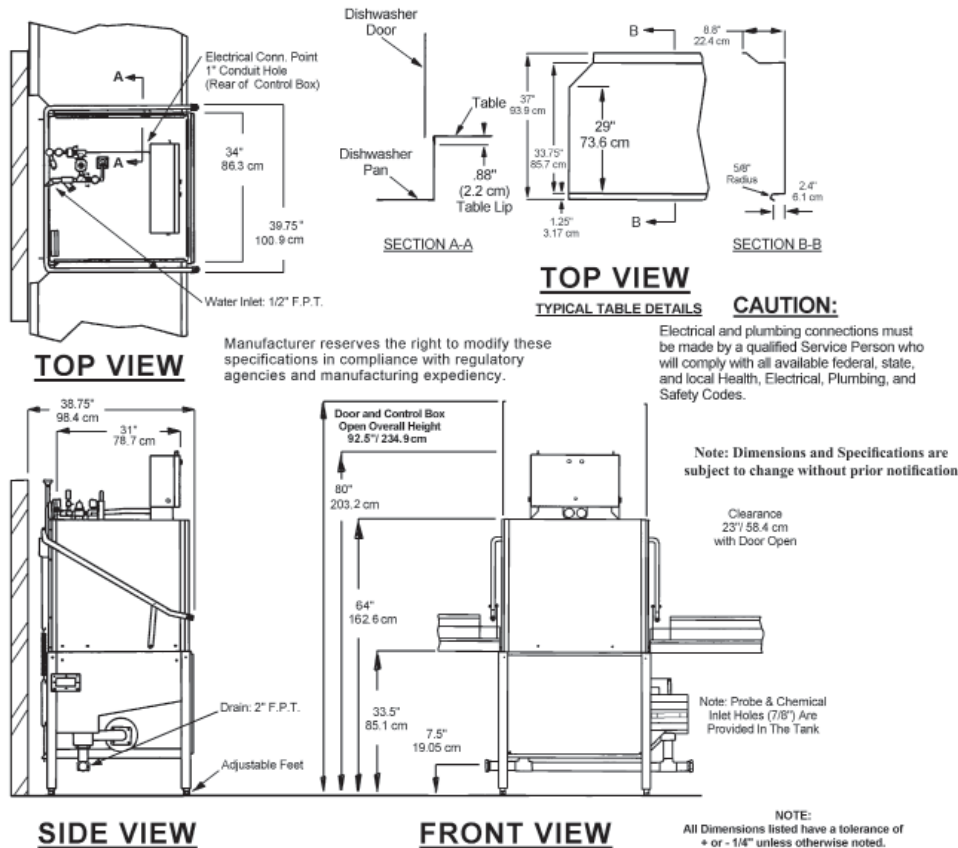

**American Dish Service**  
 Manufacturers of Ware Washing Equipment  
 WWW.AMERICANDISH.COM  
**MODEL HT-34 SPECIFICATIONS**  
 U.S. Registered Patents

|                                     |   |
|-------------------------------------|---|
| <b>Rated Capacity (Racks/Hour):</b> |   |
| <b>Wash Tank Capacity:</b>          | 15.8 Gals.<br>59.8 Liters   |
| <b>Water Temperature, Wash:</b>     | 160 Deg. F.   |
| <b>Water Temperature, Rinse:</b>    | 71 Deg. C.<br>180 Deg. F.   |
| <b>Water Consumption:</b>           | 82.2 Deg. C.  |
| <b>Wash Motor:</b>                  | 3 HP  |
| <b>ELECTRICAL REQUIREMENTS:</b>     | 3-PH, 208/240V, 40amp, 60 Hz<br>5-wire connection(neutral, ground, 3 #8 power wires, 50a capacity)<br>Single PH: 208/240V, dual circuits 60/30 amp, 60 Hz<br>Circuit 1: (neutral, ground, 2 #10 ga. wires, 40a capacity)<br>Circuit 2: (2 #6 ga. wires, 75a capacity) |

HT-25/HT-34 W/FACTORY INSTALLED BOOSTER: (3-Ph Only) single point Connection req's 208/240V, 3Ph, 50a, 5-wire connection (Neutral, Ground, 3 #8 ga. power wires, 65 a capacity) High leg goes to L-3

|  |  |
|--|--|
| <b>Water Heater:</b>                         | 8 KW   |
| <b>Rack Size:</b>                            | Large: 29"/STD 19.75"<br>73.6 cm/50.1 cm           |
| <b>Door Clearance:</b>                       | 23"<br>58.4 cm                                     |
| <b>Water Inlet:</b>                          | 1/2" F.P.T.  |
| <b>Drain:</b>                                | 2" F.P.T.  |
| <b>Height (All Doors Closed):</b>            | 80"<br>203.2 cm                                    |
| <b>Width, Table to Table (Inline Model):</b> | 34"<br>86.3 cm                                     |
| <b>Width w/ Scrap Accumulator (Overall):</b> | 48"<br>121.92 cm                                   |
| <b>Depth (Overall):</b>                      | 38.75"<br>98.4 cm                                  |
| <b>Shipping Weight:</b>                      | 570 Pounds<br>258.6 Kg.                            |
| <b>Shipping Weight W/ Built on Booster:</b>  | 652 Pounds<br>295.7 Kg.                            |
| <b>Shipping Dimensions:</b>                  | 54"L x 49" W x 89"H<br>137.2cm x 124.5cm x 226.1cm |

Copyright: 7/2006

**WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov

ADS has built a strong history based on Customer Service, Quality and Reliability. A Commitment to Excellence is the driving force behind American Dish Service.