

Model HT-34 by

**Extreme Versatility: Only NSF approved machine to clean
“Utensils, Pots, Pans & Dishes”**

**Dual Sanitizer
Low or High Temp**



**Clean Pots, Pans, or
Utensils in the provided
29” x 29” Stainless Steel
Rack or
Wash Dishes with
Standard Dish Racks**

**Ideal for Supermarkets,
Schools, Bakeries,
Commissaries, & Caterers**

At American Dish Service, Quality People, Designs, and Products have been the foundations of our organization for over *45 years*.

www.americandish.com


American Dish Service
Manufacturers of Ware Washing Equipment

900 Blake Street Edwardsville, KS 66111-3820 **Toll Free** (800) 922-2178 **Phone** (913) 422-3700 **Fax** (913) 422-6630

Model HT-34


This Powerful, Next Generation, Utensil Pot Washer/ Dishwasher provides you with all these features

- NSF Rating to Clean Pots & Dishes
- 72 Second Time Cycle
- Wash Extender for Extra Scouring Time
- Optional Built-On 70 Degree Rise Booster
- Patented Self Cleaning Spray System
- Auto Fill and Auto Shut Off
- ADS Patented Low-Water Tank Clean
- Built-In Scrap Accumulator - Keeps Wash Tank Clean
- 1.25 Gallons per Rack
- 23" Door Opening
- Powerful 3HP Wash Pump



Provides the scrubbing action needed for both applications

Requires Deep Tables

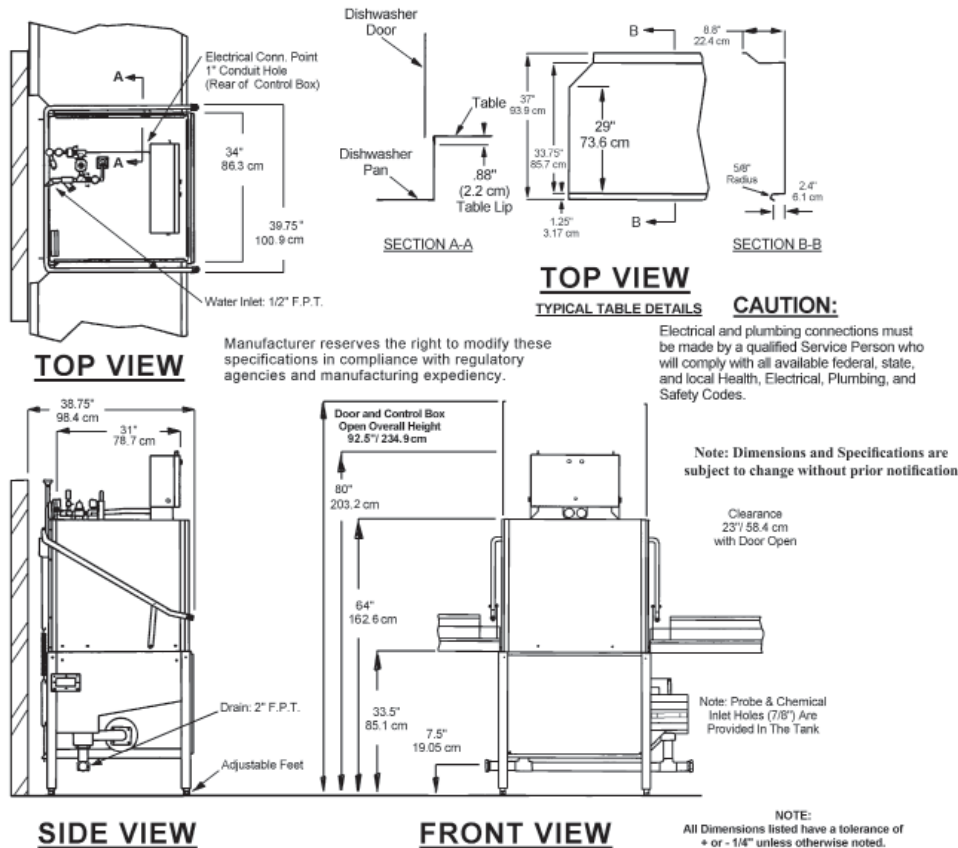

WWW.AMERICANDISH.

MODEL HT-34 SPECIFICATIONS

U.S. Registered Patents

Rated Capacity (Racks/Hour):	
Wash Tank Capacity:	15.8 Gals. 59.8 Liters
Water Temperature, Wash:	160 Deg. F.
Water Temperature, Rinse:	71 Deg. C.
Water Consumption:	180 Deg. F. 82.2 Deg. C.
	1.23 Gallons per Rack
Wash Motor:	3 HP
ELECTRICAL REQUIREMENTS:	3-PH, 208/240V, 40amp, 60 Hz 5-wire connection(neutral, ground, 3 #8 power wires, 50a capacity) Single PH: 208/240V, dual circuits 60/30 amp, 60 Hz Circuit 1: (neutral, ground, 2 #10 ga. wires, 40a capacity) Circuit 2: (2 #6 ga. wires, 75a capacity)

HT-25/HT-34 W/FACORY INSTALLED BOOSTER: (3-Ph Only) single point Connection req's 208/240V, 3Ph, 50a, 5-wire connection (Neutral, Ground, 3 #8 ga. power wires, 65 a capacity) High leg goes to L-3

Water Heater:	8 KW
Rack Size:	Large: 29"/STD 19.75" 73.6 cm/50.1 cm
Door Clearance:	23" 58.4 cm
Water Inlet:	1/2" F.P.T.
Drain:	2" F.P.T.
Height (All Doors Closed):	80" 203.2 cm
Width, Table to Table (Inline Model):	34" 86.3 cm
Width w/ Scrap Accumulator (Overall):	48" 121.92 cm
Depth (Overall):	38.75" 98.4 cm
Shipping Weight:	570 Pounds 258.6 Kg.
Shipping Weight W/ Built on Booster:	652 Pounds 295.7 Kg.
Shipping Dimensions:	54"L x 49" W x 89"H 137.2cm x 124.5cm x 226.1cm

Copyright: 7/2006

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

ADS has built a strong history based on Customer Service, Quality and Reliability. A Commitment to Excellence is the driving force behind American Dish Service.