Low Temp AFB Bakery



The Economical Answer to Tall Warewashing Needs

Available in Corner and Pass-Through Models 27.5" door opening with safety interlock





Sheet pans require a special stainless steel dishrack for proper washing.



STANDARD FEATURES

- Available in either 90, 120, or 150 second time cycle
- Uses standard 20" x 20" racks
- High pressure, 1.5 HP pump
- Built-in chemical dispensing

© American Dish Service

For detailed specifications, go to www.americandish.com

Low Temp AFB Bakery

The Economical Answer to **Tall Warewashing Needs**

Standard Features

- Quality & reliability
- · Effective washing & sanitizing of bakery trays and pots & pans
- Built in scrap accumulator

AFB Series Specifications


AFB Series	Family Models AFB		
Rated Capacity (Racks/Hr.) Wash Time (Sec.)		25 60	12 75
Rinse Time (Sec.)	30 15	45 15 120	60 15 150
Water Temperature (Supply) 130 Water Consumption (Per Cycle)	F Min.		
Motor			

Connect to Supply Sources using 10-12 AWG copper wires on a clean circuit. Circuit Protection: 20 AMP Circuit Breaker or Fuse with a 20 AMP Rating.

Rack Size 19.75" x 19.75" (50.2 cm x 50.2 cm)
Door Clearance
Water Inlet
Drain (Scrap Trap)
Height (Door Open)
Height (Door Closed)
Width (Overall)
Width (Table to Table) 25" (63.5 cm)
Depth (Overall)
Shipping Weight
Shipping Dimensions
64.5 cu. ft (1.83 cu meters)



(Longer lengths available)

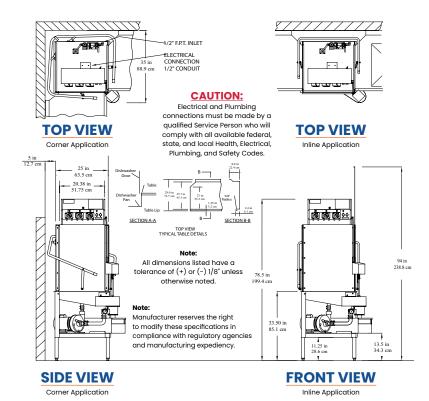

Effective 2/2023



Warning: Cancer and Reproductive Harm - www.P65Warnings.ca.gov





© American Dish Service

900 Blake Street | Edwardsville, Kansas, 66111 913.422.3700 | Toll-Free: 800.922.2178 | Fax: 913.422.6630 orders@americandish.com | americandish.com